


FLAIL MOWERS FORESTRY MULCHERS

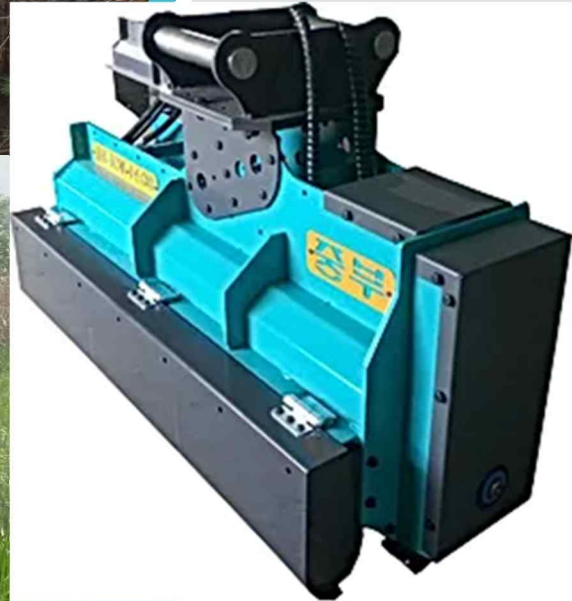

Excavator Flail Mowers

Grasses & Thin Trees Trimming

Optimized to mow grasses and shatter thin tree branches.
 Unique design of blades cleans grasses speedily and clearly. It shreds grasses and tree branches in small size.
 Proper material and heat treatment for blades lengthen lifetime of blades.

Specially-made Rotation Blades
 One-direction Turning for safety
 High Speed RPM



AKRM Series



Model			AKRM 1600-5	AKRM1600-10	AKRM 1600-14
		Specifications			
Op. Weight	kg		320(stn) / 380(hrtn)	360(stn) / 420(h.rtn)	370(stn) / 450(h.rtn)
Op. Pressure	bar		200~250	200~250	200~250
Rotation	rpm		3500~4200	3500~4200	3500~4200
Max. Cutting Dia.	mm		50	50	50
Motor Capacity	cc		27	36	47
No. of Blades	pieces		36	36	36
Excavator Weight	ton		5~6.5	8~10	14~16
Dimensions	Length	mm	1780	1780	1780
	Height	mm	920(std)/1020(h.rtn)	950(stn)/1050(h.rtn)	1020(stn)/1120(h.rtn)
	Width	mm	610	610	610
Pulley - Upper		inch	9.5	9.5	9
Pulley - Lower		inch	5	5	5.5
Belt		inch	B52	B52	B52
Rotor	Total Length	mm	1740	1740	1740
	Cutting Length	mm	1500	1500	1500
	Diameter	mm	115	115	115
Motor Type			Piston	Piston	Piston

Excavator Flail Mowers

Grasses & Thin Trees Trimming

Optimized to mow grasses and shatter thin tree branches. Unique design of blades cleans grasses speedily and clearly. It shreds grasses and tree branches in small size. Proper material and heat treatment for blades lengthen lifetime of blades.

Specially-made Rotation Blades
One-direction Turning for safety
High Speed RPM



AKRTM Series

Model			AKRTM1200-2	AKRTM1200-3	AKRTM1200-5	AKRTM1200-10W
Specifications						
Op. Weight	kg		270(stn) / 290(h.rtn)	280(stn) / 300(h.rtn)	300(stn) / 340(h.rtn)	320(stn) / 360(h.rtn)
Op. Pressure	bar		200~220	200~220	200~250	200~250
Rotation	rpm		3500~4200	3500~4200	3500~4200	3500~4200
Max. Cutting Dia.	mm		50	50	50	50
Motor Capacity	cc		15	20	25	36
No. of Blades	pieces		30	30	30	30
Excavator Weight	ton		2~2.3	3~3.5	5~6.5	8~10
Dimensions	Length	mm	1480	1480	1480	1480
	Height	mm	700	735	740(stn)/840(h.rtn)	750(stn)/850(h.rtn)
	Width	mm	820	820	820	820
Pulley - Upper	inch		9	9	9	9
Pulley - Lower	inch		5	5	5	5
Belt	inch		B47	B47	B47	B47
Rotor	Total Length	mm	1440	1440	1440	1440
	Cutting Length	mm	1200	1200	1200	1200
	Diameter	mm	115	115	115	115
Motor Type			Piston	Piston	Piston	Piston

Excavator Forestry Mulchers

Tough Design for Wood Mulching

Blades are engineered to shatter woods and designed to turn directions of blades to use in double.

Double-time use

One-direction Turning for safety

High Speed RPM



AKRBM Series

Model			AKRBM 1200-5	AKRBM 1200-8	AKRBM 1200-14
Specifications					
Op. Weight	kg		350(stn) / 420(h.rtn)	380(stn) / 450(h.rtn)	380(stn) / 470(h.rtn)
Op. Pressure	bar		200~250	200~250	200~250
Rotation	rpm		3500~4500	3500~4500	3500~4500
Max. Cutting Dia.	mm		1 ~ 200	1 ~ 200	1 ~ 200
Motor Capacity	cc		27	36	47
No. of Blades	pieces		28	28	28
Excavator Weight	ton		5~6.5	8~10	14~16
Dimensions	Length	mm	1450	1450	1450
	Height	mm	920(std)/1020(h.rtn)	950(stn)/1050(h.rtn)	1020(stn)/1120(h.rtn)
	Width	mm	620	620	620
Pulley - Upper	inch		9.5	9.5	9
Pulley - Lower	inch		5	5	5.5
Belt	inch		B52	B52	B52
Rotor	Total Length	mm	1450	1450	1450
	Cutting Length	mm	1200	1200	1200
	Diameter	mm	168	168	168
Motor Type			Piston	Piston	Piston